

HANDHELD PORTABLE SCANNER USING RASPBERRY PI

M.Praveena¹, P.Ramyadevi², R.Renugadevi³, V.Shrilekha⁴, P.Krishnamoorthy⁵

praveena.m.1993@gmail.com¹, pramyadevi3@gmail.com², renu.ece81@gmail.com³, shrilekha37@gmail.com⁴, krishna15blue@gmail.com⁵

^{1,2,3,4}Student, Department of ECE, KPR Institute of Engineering and Technology Coimbatore

⁵Assistant professor, KPR Institute of Engineering and Technology, Coimbatore

Abstract: *An image scanning system with Raspberry pi can extract information from images without need for an external processing unit, an interfacing devices used to make results available to other devices. The choosing of an Raspberry pi platform is very unique and easy to implement. The paper processed an image scanning technique in apython based on Raspberry pi board. Considering the requirements of image scanning and recognition algorithm, Raspberry pi processing module and its peripherals, implementing based on this platform, finally actualized python image capturing using Raspberry pi system. Experimental results show that the designed system is fast enough to run the image scanning, recognition algorithm, and the data stream can flow smoothly between the camera and the Raspberry pi board.*

Keywords –Image capturing, python and Raspberry pi board.

1. INTRODUCTION

Traditional ways for personal identification depend on external things such as keys, passwords, etc. But such things may be lost or forgotten. Present scanners are huge in size and working process is difficult compared with handheld portable scanner. One possible way to solve these problems is through biometrics, for every person has his special biometric features definitely. Biometrics identification has gained increasing attention from the whole world [1]. Biometrics

features that can be used for identification include fingerprints, palm prints, handwriting, vein pattern, facial characteristics, face, and some other methods such as voice pattern, etc [2]. Compared with other biometric methods, the face recognition has the following advantages: The face image acquisition requires no physical contact, so face identification system is non-invasiveness Since the face is created in a nearly random morphogenetic process during the gestation, it has little probability to find two people in the world whose face textures are identical. So face recognition is the most accurate method and has the lowest false recognition rate.

The face recognition has more stability than other biometric identification methods because the face has much more features than other biometrics and it won't change in people's life.

With the advantages of noninvasiveness, uniqueness, stability and low false recognition rate, face recognition has been researched widely and has a broad usage, such as security, attendance, etc. Most of the recognition systems are based on PC. However, the portability of PC is limited by its weight, size and the high power consumption. Thus results in that the using of face recognition is confined in few fields, and it is inconvenient to use. The way to get rid of the limit of PC is using embedded system.

The designed EICSRS platform acquires the images and stores them into the real time database, which in turn later used for comparing the faces of the users to provide access to them or to deny the access to a place or to operate a device. Recent technological advances are enabling a new generation of smart cameras that represent a

quantum leap in sophistication. While today's digital cameras capture images, smart cameras capture high-level descriptions of the scene and analyze what they see.

These devices could support a wide variety of applications including human and animal detection, surveillance, motion analysis, and facial identification. Fortunately, Moore's law provides an increasing pool of available computing power to apply to real-time analysis. Smart cameras leverage very large-scale integration (VLSI) to provide such analysis in a low-cost, low-power system with substantial memory. Moving well beyond pixel processing and compression, these systems run a wide range of algorithms to extract meaning from streaming video.

Because they push the design space in so many dimensions, image capturing are a leading edge application for embedded system research. Most of the capturing systems are based on PC. However, the portability of PC is limited by its weight, size and the high power consumption. Thus results in that the using of image capturing is confined in few fields, and it is inconvenient to use. The way to get rid of the limit of PC is using embedded system. We analyzed the design method of the image capturing and recognition algorithm, Raspberry Pi board module and its peripherals, implementing based on this platform. The Raspberry Pi has a Broadcom BCM 2835 a System on Chip (SoC). Soc has ARM 1176JZF-S 700 MHz processor, Video Core IV GPU and was originally shipped with 256 megabytes of RAM, later upgraded to 512 MB. It does not include a built-in hard disk or solid-state drive, but uses an SD card for booting and persistent storage. The Foundation provides Debian and Arch Linux ARM distributions for download.

Tools are available for Python as the main programming language with support for BBC BASIC (via the RISC OS image or the Brandy Basic clone for Linux), C, Java and Perl.

2. SYSTEM HARDWARE DESIGN

The whole system is composed by following parts: an image capturing camera, Raspberry Pi board to run image recognition programs on it. DVI compatible monitors also connected with this system during initial stages

to preview the captured images and give the user indication. The system block diagram is shown in Figure 1.

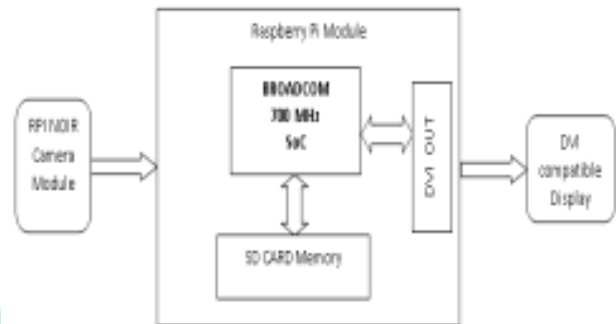


Figure .1 System Block Diagram

2.1 RASPBERRY PI BOARD

This board is the central module of the whole embedded image capturing and processing system as given in figure 2. Its main parts include: main processing chip, memory, power supply HDMI out, Ethernet port, USB ports and abundant global interfaces.

2.1.1 MAIN PROCESSING CHIP

The main signal processing chip used in our system is a Broadcom 700MHz Chip in which core s a 32 bit ARM1176JZF-S RISC processor designed by Advanced RISC Machines, Ltd. It has very rich peripheral. This main processing chip contains a camera and display units.

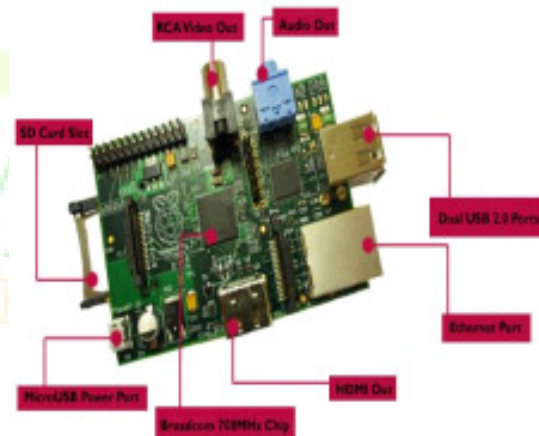


Figure 2. Raspberry Pi Board

2.1.2 MEMORY

The design does not include a built in hard disk or solid state drive, instead relying on an SD

card for booting and long term storage. This board is intended to run Linux

kernel based operating systems. This Raspberry Pi module has a Samsung class 4 micro SD card preloaded with the official Raspberry Pi NOOBS (New Out of Box Software) package, and a beautifully screen printed Micro SD card adaptor

2.1.3 INTERFACES

Plenty of interfaces are contained on the Raspberry Pi board, including 2 USB ports through which a Keyboard and mouse can be connected, a HDMI out for connecting

HD TVs and monitors with HDMI input or HDMI to DVI lead for monitors with DVI input. Other peripherals like A standard RCA composite video lead to connect to

analogue display if HDMI output is not used. Ethernet port is used for networking even though it is optional, although it makes updating and getting new software for

Raspberry Pi board much easier. An Audio lead is also provided for getting the stereo audio if HDMI is not used, otherwise HDMI will get digital audio with it.

3. CAMERA INTERFACE

The camera module used in this project is RPI NOIR CAMERA BOARD i.e. Raspberry Pi No IR camera board as shown in the Figure 3. The camera plugs directly into the CSI connector on the Raspberry Pi. It's able to deliver clear 5MP resolution image, or 1080p HD video recording at 30fps. The module attaches to Raspberry Pi,

by way of a 15 pin Ribbon Cable, to the dedicated 15 pin MIPI Camera Serial Interface (CSI), which was designed

especially for interfacing to cameras. The CSI bus is capable of extremely high data rates, and it exclusively carries pixel data to the BCM2835 processor.

This camera board which has no infrared filter making it perfect for taking infrared photographs or photographing objects in low light (twilight) conditions. Other features of this camera board are

Automatic image control functions
 ,Programmable controls for frame rate 32 bytes of embedded one time programmable (OTP) memory and Digital video port

(DVP) parallel output interface
 Excellent

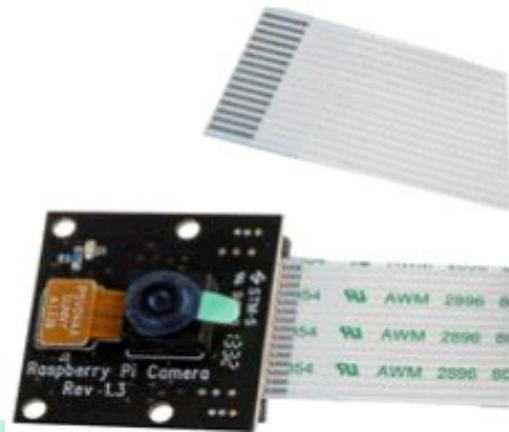


Figure 3. Camera interface

4.METHODOLOGY OF WORK

we use Eigen faces methodology of face recognition for finding the matches.

5. FUTURE APPLICATIONS

To date, exploitation of smart camera technology has been mainly for industrial vision systems, but a crossover is just starting to take place. Camera technology will

into enter new applications, for example, in the security and access control The system designed system can be operated in two different sessions, ie one for capturing and creating a data base and the other session is to capture the image and which can be used for identifying or comparing the images in the database. Here in the second session markets, in the automotive industry, for collision avoidance, and even – one day – for the toy industry. Even our automobiles may soon be outfitted with miniature eyes. Built into a cruise control system, for instance, such a camera would suddenly alert the driver if

it noted a rapidly decelerating vehicle. The cameras could take the place of the rear view and side-view mirrors, thereby eliminating dangerous blind spots and - in the event of an accident - recording the seconds prior to a collision. Another example would be with intelligent lifts. An office block, with many lifts and floors, may see a lot of people travelling up and down between floors, particularly at high traffic times such as early morning or end of the working day. At the moment, lifts are called by somebody pressing a

button and putting in a request for the lift to stop at a particular floor. Connected with smart camera technology, lifts could be routed on demand, working intelligently, stopping only when there was a pre-set number of passengers waiting at a floor – and missing out a floor if too many people were waiting to meet the maximum capacity of the lift.

6. CONCLUSION

It's a progress of realizing embedded image capturing system. We describe our design method in this paper. Based on these methods, we design the experimental

prototype of the embedded image capturing system with Raspberry Pi system. This system is smaller, lighter and with lower power consumption, so it is more convenient than the open source code, it is freer to do software development on Linux. Experimental results show that it's an effective

method of using Raspberry Pi board to actualize embedded image capturing system.

7. SCANNED IMAGES



Figure 4.scanned image



Figure 5.scanned image

REFERENCES

1. David Zhang, Joseph P. Campbell, Davide Maltoni, Ruud M. Bolle, "Guest Editorial Special Issue on Biometric Systems", IEEE Transactions on Systems, Man, and Cybernetics-Part C: Applications and Reviews, VOL. 35.
2. XIE Yonghua, LIU Chuancai, YANG Jinyu(2008). The algorithm based on DDCT and TCSVD of humanface feature extraction and recognition". THE COMPUTE ENGENIERING, Vol. 08, No. 1.
3. G.Yang and T.S. Huang, Human face Detection in complex background, Pattern Recognition, vol.27, no.1.1994.
M.S.Bayhan and M.Gokmen, Scale and pose invariant real time face detection and tracking, Proc.the 23rd Int. Symposium on Computer and Information Science, pp.1-6, October 2008.
4. ZHANG Rui, YU Zhongtang (2008). The method of human-face recognition based on analyzed of two ranks and doubles two dimensions THE COMPUTER ENGENIERING, Vol. 08, No.5
5. Raspberry Pi – www.raspberrypi.org
6. FriendlyARM - www.friendlyarm.net/